



Autoswing
on Rotex Pro
only



Electromagnetic



QuickRelease® system



Pre-heat time



Save different programs



SmartTouch® Controller
(Rotex Pro only)



GPX 3200W
on Clam Pro GPX only



- Perfect heat & pressure distribution
- single manual swing plate of 40x50 cm
- Manual rotation on One & Lite
- Automatic rotation on Pro v2

User friendly :

- * Complete lateral clearance of the plate
- * Automatic opening by electromagnet (Lite & Pro only)


* Reversible C-shaped part & Quick Release

- Optimal heat & pressure distribution
- Robust frame
- Suitable for laser transfer applications & sublimation on textile and rigid materials
- Ideal for small to medium productions
- Manufactured in France
- 2-year guarantee on the machine
- 10-year guarantee on heating element


OPTIONAL ACCESSORIES



Support table




DTG plate




Set of 4 plates




Laser pointer




Teflon Sheet



Nomex® cover



Shoe plate



Height indicator

Email

sales@sefa.fr
support@sefa.fr
www.sefa.fr



Phone

Office : + 33 4 68 74 05 89
Fax : + 33 4 68 74 24 08



Address

SEFA SAS
Z.I. PASTABRAC
11 260 ESPERAZA (FR)



TRANSFER
YOUR IMAGINATION

Chemica

Stilscreen

Sefa

Eims

TransferID

TECHNICAL CHARACTERISTICS

Type	Electromagnetic (Rotex Lite & Pro) Manual (Rotex One)
Operation	Swing - Rotating Plate Autoswing on Rotex Pro
Platen size	40x50 cm / 16x20"
Max thickness	17 mm
Weight	81 Kg
Pressure	590 gr/cm ²
°C / °F Max	220 °C / 429 °F
Power	2500 W (One & Lite) 3200 W (Pro)
Power supply	240 V Single-phase
Amperage	11 A (One & Lite) 14 A (Pro)
Applications	Direct to Garment, Flex, Textile Sublimation, Laser Transfer, Screen Printing
Dimension	759x909x569 mm 30x36x22"

SETTINGS



Electronics developed by Sefa
Accurate and fast regulation
(PID control) for a wide range
of heat transfer products : Flex,
flock,
sublimation, screen printing
transfer.
Double timer (main + pre-heat)

2 cycle counters
3 settable programs
Stop cycle function
From 0 to 570 sec (precision +/- 1%).
From 0 to 220°C (precision +/- 1%).
Heating time to reach 180°C : 15 min.

ROTEX ONE & LITE

SmartTouch® controller
developed by Sefa

Recipes menu with adap-
tive regulation parameters
depending on the job:
flex, sublimation on textile,
sublimation on rigid sub-
strates, DTG...

Advanced electronics

- 10 fully editable recipes menus
- Independent time for each plate with Multi timer
- Cycle counters
- Stop cycle function
- ECO GREEN mode

From 0 to 600 sec (precision +/- 1%).
From 15 to 255°C (precision +/- 1%).
Heating time to reach 180°C : 10 min.



ROTEX PRO V2




180° reversible
C-shaped lower
part with Quick
Release system


OPTIONAL ACCESSORIES



TAB-98 LITE
Support table




PLA-DRY M
Sponge plate to dry
pretreated clothes.




PLA-SET
Set of 4 plates
12 x 8 cm, 15 x 15 cm,
12 x 45 cm, 25 x 30 cm.




CROI-161
Laser system to place your
transfers with more pre-
cision (1 extra laser can be
added).



PLA-SHOES-CV
Special plate that fit textile
and sport shoes (side and
back).




HOU-50
Heat resistant Nomex® co-
ver for easier threading and
protection.



ROTEX-IND
Full version of the Rotex with
height indicator (can't be
added separately).

DIMENSIONS

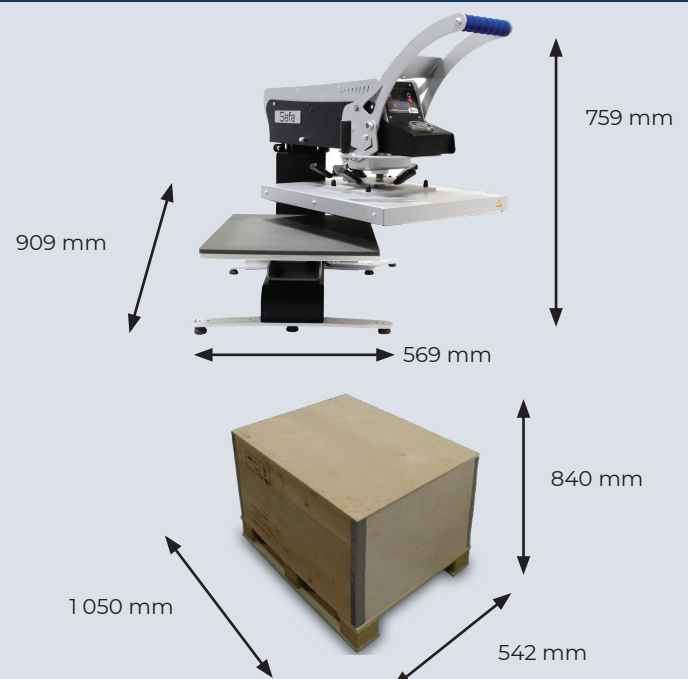

Box weight CAI-100 : 25 kg